


Focus

FM/I-400

Active low-mid module with Beam Steering, 32 × 4",
60 Hz – 17 kHz, approx. 224 × 1636 × 274 mm

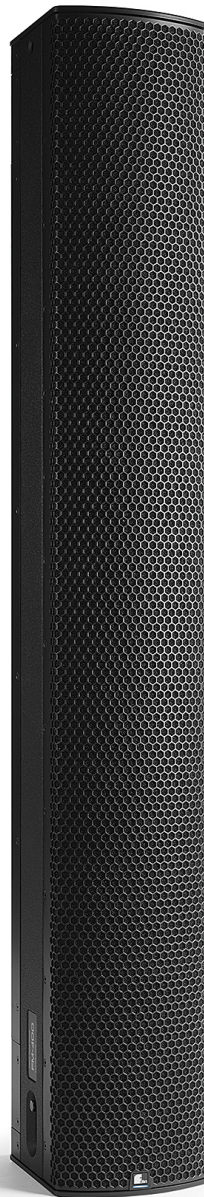

Focus FM/I-400

The FM/I-400 is an active low-mid module from the Focus series. As with all products in this series, the Fohhn Beam Steering Technology provides real-time, software-controllable dispersion and eliminates the need for mechanical tilting. Developed for demanding mobile applications and fixed installations, the FM/I-400 achieves high sound pressure levels and can be flexibly combined with the FM/I-100/110 high frequency modules and further enhanced with the DLM-300 low-mid extension.

Main features

- Available as FM variant for mobile applications or FMI variant for fixed installations
- 32 × 4" long excursion driver
- 16 integrated class-D amplifiers with DSP
- SPL max. of a module: 134 dB (94 dB @ 100 m)
- Up to 6 modules in one stack
- Frequency range: 60 Hz – 17 kHz
- Convenient real-time control of vertical dispersion with Fohhn Audio Soft
- Vertical beam width: 0° to 90°, sound inclination angle: -40° to +40° (adjusted in 0.1° increments)
- Fohhn Two Beam Technology (two separate dispersion beams)
- Fohhn Side Lobe Free Technology (suppression of side lobes)
- Acoustic centre displaceable over entire line length
- Low system latency of only 0.95 ms (AES/EBU)
- Easy rigging thanks to the Fohhn Quicklock System
- Integration in evacuation systems according to DIN EN 60849 / VDE 0828
- Green power standby mode



Available with the following color options



Black

Equipped with the following Fohhn technologies



Fohhn Beam
Steering
Technology



Fohhn Source
Division
Waveguide



Fohhn DSP
inside



Flyable product



Special colors
optional



Ball impact
resistant

Technical data

Electroacoustic features

acoustic design	electronically steerable line array speaker
components	32 × 4" long excursion with treated cones, neodymium motor
maximum SPL	134 dB (94 dB @ 100m)
frequency range	60 Hz – 17 kHz
operational mode	active, 16-channel DSP amplifier, class D
horizontal dispersion, low-mid	90°
horizontal dispersion, fullrange	80°
vertical beam width, digitally controlled	0° – 90° in 0.1° steps
vertical inclination angle, digitally controlled	-40° – +40° in 0.1° steps
acoustic centre	0% (at the bottom) to 100% (at the very top)

Features

enclosure	multiplex birch plywood, Aluminium
front design	steel grille in enclosure colour, backed by acoustically transparent foam
protection grille	steel grille, ball impact resistant, powder-coated
weight	approx. 41 kg
standard colours	black or white powder coating
mounting points	4 × M8 threads, integrated rigging system
dimensions (W × H × D)	approx. 224 × 1636 × 274 mm

Optional features

optional colours	RAL Classic / NCS / Pantone on request
------------------	--

CAAD simulation data

simulation data	EASE
-----------------	------

Electronic features

amplifier type	Pure Path Digital PWM
audio inputs	2 independent line inputs with automatic priority, transformer-balanced
audio outputs	2 × link
amplifier power	16 × 120 W
DSP channels	16
frequency response	20 Hz – 20 kHz
gain	28 dB
input sensitivity	1.4 V
signal/noise ratio	>105 dB/A
protective circuit	soft start, overtemperature, short circuit, overload
power supply	100 V – 240 V AC 50/60 Hz, power supply with Power Factor Correction
power consumption	standby 10 W, max 800 W
power factor (PFC)	> 90 %
fault current	< 1,0 mA
protection	16A @ 230 V
low power	Green Power Standby Mode
emergency current	external USV 230 V 1000 W 16 A
temperature range	0 – 40°C
cooling	temperature-controlled fan
weight (electronics)	approx. 5,5 kg
	2 × link

Controller

digital signal processors	2
independent limiters	4
gain	-80 dB – +12 dB
volume	-80 dB – +12 dB
EQ	10-band parametric EQ, Gain, +/-12 dB, Frequenz 10 – 20 kHz, Q 0.1 – 100
selective 3-band limiting	bass / mid / high
delay	0,01 – 350 ms, or 3,4 mm – 120 m
X-over	Linkwitz-Riley 4. order, 24 dB/octave, high pass 10 Hz – 20 kHz, low pass 10 Hz – 20 kHz
system latency	0.95 ms
filter technology	56-bit double precision
AD	24 bit / 96 kHz

Remote control and remote monitoring

remote control	Fohhn Audio Soft, Fohhn-Net
remote monitoring	temperature, protect, signals, power supply, Fohhn Net, Fohhn Audio Soft, pilot tone
fault message contact	relay 2 × changeover
simulation beam	Fohhn-Net, Fohhn Audio Soft

Connections

audio outputs	2 × XLR, balanced
audio inputs	1 × line input, XLR, transformer balanced
Fohhn Net	1 × RJ-45 Neutrik in, 2 × RJ-45 Neutrik out
mains connections	1 × Powercon in, 1 × Powercon out

Display LEDs

network control	receive / send remote control LED
power on / off (standby)	green = on, red = standby, red flashing = fault

power rating (nominal/program): according to IEC-60268-5

power rating (peak); maximum SPL: peak, 20 ms with bandpass filtered pink noise signal according to IEC 60268-2 at one octave above the lower limit of the frequency range

sensitivity: 2,83 V at 8 ohms (2 V at 4 ohms, 4 V at 16 ohms) at a distance of 1 m under anechoic fullspace conditions

frequency range: -10 dB under anechoic halfspace-conditions

weight: net weight without optional equipment

Intelligent Protection Circuit (IPC): voltage-controlled semiconductor circuit protecting the HF-driver against overload highly effective and with very short attack time

cut-off frequency: -10 dB under anechoic halfspace-conditions with speaker preset

heat dissipation: pink noise, 6 dB crest, 1/4 Pmax

Fohhn Audio AG
Großer Forst 15
72622 Nuertingen
Germany

Phone +49 7022 93323-0
Fax +49 7022 93324-0
www.fohhn.com
info@fohhn.com

