


# EasyPort

## FP-22 slave

Passive slave speaker for FP-22 modular, 8" / 1", 65 Hz – 20 kHz, 117 dB SPL max., approx. 240 × 510 × 270 mm

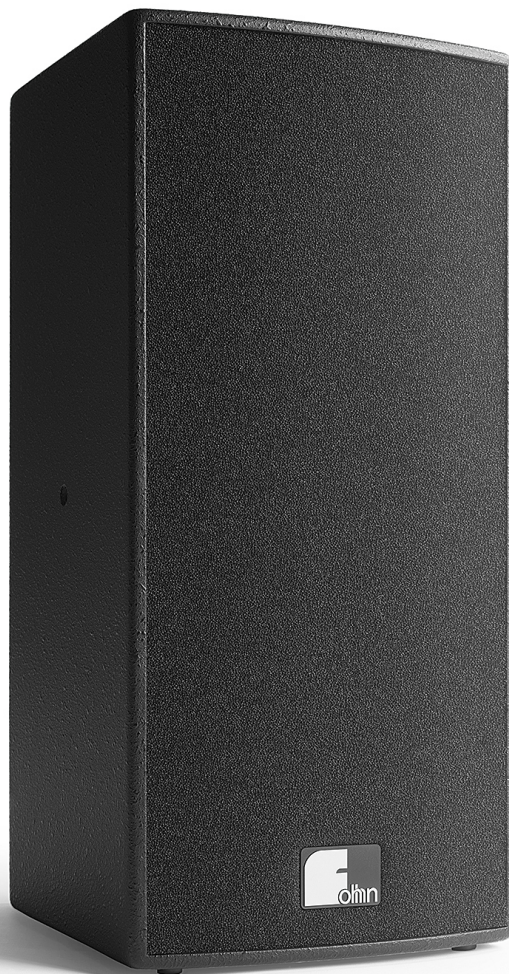

# EasyPort FP-22 slave

The EasyPort FP-22 slave is a passive auxiliary speaker for connection to a FP-22 modular. Their acoustic and design similarities allow the loudspeakers to be easily connected to each other via a Speakon cable. This allows the user to sonicate additional areas, to larger numbers of people.



## Main features

- Perfectly matched 8" / 1" short horn speaker components
- SPL max. 117 dB
- Very light weight, at around 9 kg
- Available in all RAL Classic colors

Available with the following color options



Black

Equipped with the following Fohhn technologies



Special colors  
optional



Ball impact  
resistant



# Technical data

## Electroacoustic features

acoustic design	passive loudspeaker system 2-way, vented design
power rating (nominal)	120 watts
components	8" / 1" compression driver with short horn
maximum SPL	117 dB
frequency range	65 Hz – 20 kHz
operational mode	passive (for operation with FP-22 modular)
nominal dispersion (h x v)	100° x 100°

## Features

enclosure	multiplex birch plywood
front design	acoustic foam
speaker stand pole	integral, ø 36 mm
weight	approx. 9 kg
standard colours	textured paint, black
handles	1 handle
mounting points	2 x M8 thread for U-bracket
dimensions (W x H x D)	approx. 240 x 510 x 270 mm

## Optional features

optional colours	RAL Classic / NCS / Pantone on request
------------------	--

power rating (nominal/program): according to IEC-60268-5

power rating (peak); maximum SPL: peak, 20 ms with bandpass filtered pink noise signal according to IEC 60268-2 at one octave above the lower limit of the frequency range

sensitivity: 2,83 V at 8 ohms (2 V at 4 ohms, 4 V at 16 ohms) at a distance of 1 m under anechoic fullspace conditions

frequency range: -10 dB under anechoic halfspace-conditions

weight: net weight without optional equipment

Intelligent Protection Circuit (IPC): voltage-controlled semiconductor circuit protecting the HF-driver against overload highly effective and with very short attack time

cut-off frequency: -10 dB under anechoic halfspace-conditions with speaker preset

heat dissipation: pink noise, 6 dB crest, 1/4 Pmax

**Fohhn Audio AG**  
**Großer Forst 15**  
**72622 Nuertingen**  
**Germany**

**Phone +49 7022 93323-0**  
**Fax +49 7022 93324-0**  
**[www.fohhn.com](http://www.fohhn.com)**  
**[info@fohhn.com](mailto:info@fohhn.com)**

